

Type : Rechargeable Lithium Ion Prismatic Cell

Nominal Dimension (without label/sleeve) : Width = max. 30.0 mm
 Height = max. 48.0 mm
 Thickness (shipment) = 6.6 mm *
 Thickness (after 300th cycle) = 6.9 mm

Applications : Recommended discharge current
 208 to 2080 mA

Nominal Voltage : 3.7 V

Capacity : Typical: 1040 mAh
 Minimum: 1000 mAh
 When discharged at 520 mA to 2.8 V at 20 °C

Charging Condition : 832 mA to 4.2 V for 2.5 hrs at 20 °C

Recommended Charging Condition in Applications : 832 mA to 1040 mA (0.8 to 1C)
 Charge termination control recommended control parameters:
 Taper current 0.05C at 4.2 V

Clamped Charging Voltage : 4.2 V +/- 0.05 V

Service Life : 300 cycles (80% of typical capacity)

Weight : Approx. 21 g


Internal Resistance : 70 mΩ max. at 1000 Hz

Ambient Temperature Range : Charging : 0 to 45 °C
 Discharging : -30 to 60 °C **
 Storage (1 month) : -20 to 45 °C
 Storage (6 months) : -20 to 40 °C
 Storage (1 year) : -20 to 35 °C


Note : * The "Thickness (shipment)" is the maximum value without label/sleeve of the standard charging condition (30% state of charge).

Precaution : ** 60 °C is only applied during 1C or lower discharging current


Model No.: **GP623048L104**

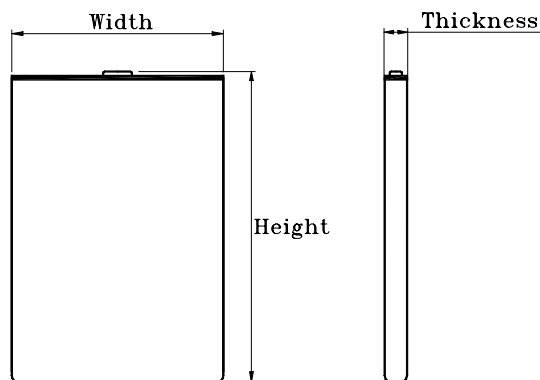


Discharging Characteristics

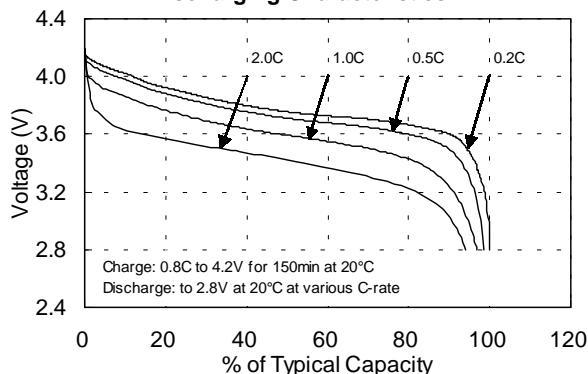

Discharge Temperature Characteristics

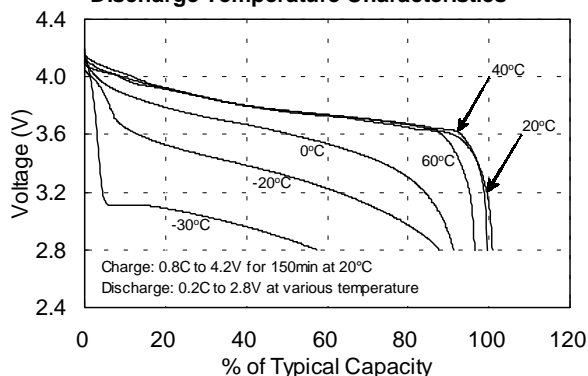

Charging Characteristics

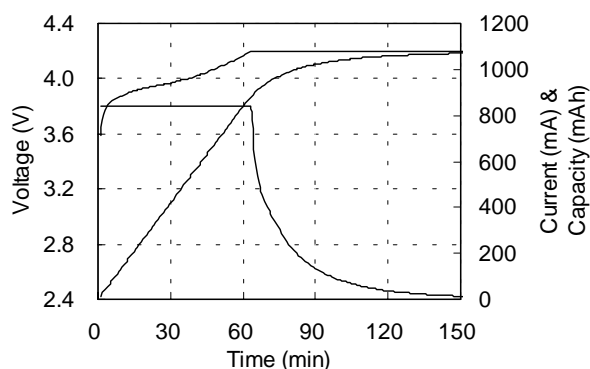

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

For detail information, please refer to the relevant product specification.

YRS6214 rev.00